



FLEXICORE™ ROUND GUIDE ASSEMBLY

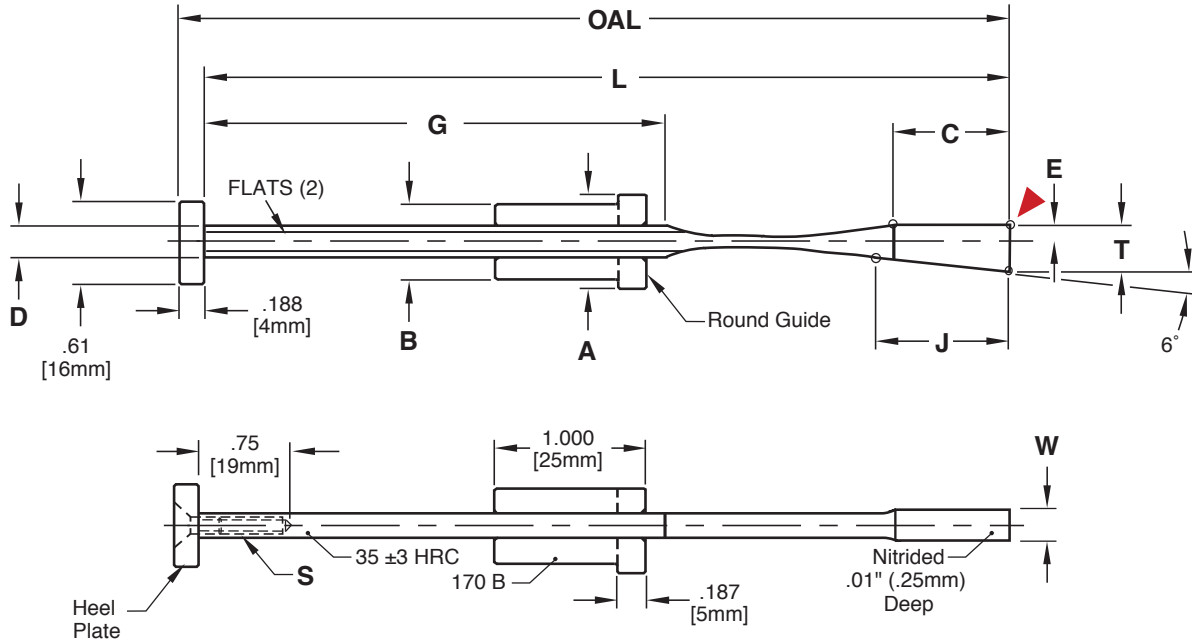

Design Guidelines:

- The FlexiCore can be cut down and re-tapped to accommodate specific applications.

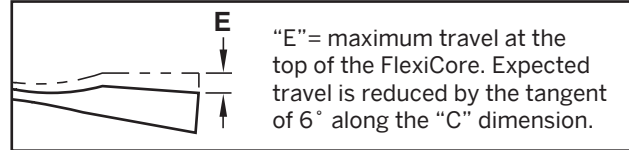

Inch Standard

M FlexiCore: AISI 4340 with thin, dense Chromium treatment, Guide: CA954 Solid Bronze, Heel Plate: AISI 1018

CATALOG NUMBER	T +.002 -.000	W +.002 -.000	L +.010 -.000	OAL REF	D +.000 -.001	C ± .015	E	G +.01 -.00	J	S (Included)	A	B
FCR35X24L6	.354	.244	6.400	6.588	.234	.875	.137	3.49	.957	#8-32 x 3/8	.625	.500
FCR35X32L6	.354	.322	6.400	6.588	.250	.875	.137	3.48	.957	#8-32 x 3/8	.625	.500
FCR45X40L7	.453	.401	7.875	8.062	.312	1.000	.177	4.38	1.025	#10-24 x 1/2	.750	.625
FCR45X48L7	.453	.480	7.875	8.062	.312	1.000	.177	4.38	1.025	#10-24 x 1/2	.750	.625

▶ CAD insertion point

Metric Standard

CATALOG NUMBER	T +.05 -.00	W +.05 -.00	L +.25 -.00	OAL REF	D +.000 -.025	C ± .35	E	G +.25 -.00	J	S (Included)	A	B
FCR9X6L160	9	6.2	162.5	166.5	5.94	22	3.5	88.6	24.3	M4-0.7 x 12	16	12
FCR9X8L160	9	8.2	162.5	166.5	6.35	22	3.5	88.4	24.3	M4-0.7 x 12	16	12
FCR11X10L200	11.5	10.2	200.0	204.0	7.92	26	4.5	111.2	26.0	M5-0.8 x 14	20	16
FCR11X12L200	11.5	12.2	200.0	204.0	7.92	26	4.5	111.2	26.0	M5-0.8 x 14	20	16
FCR12X14L200	12.5	14.2	200.0	204.0	7.92	30	4.5	107.2	28.5	M5-0.8 x 14	20	16
FCR12X16L200	12.5	16.2	200.0	204.0	7.92	30	4.5	107.2	28.5	M5-0.8 x 14	20	16

Assemblies include: FlexiCore, Round Guide, Heel plate, and Flat head Cap Screw.
Assembly components also sold individually. Refer to page H-23 for information.